

TR15H

Panel Attributes


Screen Size (Diag.)	15"
Resolution	1024 x 768
Brightness (Typ.)	400nit
Contrast ratio(Typ.)	500:1
Viewing angle	178° / 178°
Response Time(Typ. GTG)	8ms
Aspect Ratio	16:9

Dimensions, Power & Other

Housing Color	Custom
Built-in Speaker	Optional
Touch	Optional
Dimension (W x H x D)	16.1" x 13.4" x 7.8"
Electrical Ratings	AC 100 - 240V(50/60Hz)
Power Consumption (Typ.)	60W
Mullion Compensation	Serial Command or Remote control
Operating Temperature	32°F - 104°F
Operating Humidity Range	20~80%
Industrial Reliability	30,000+Hours
Warranty	One Year

Connectivity

HDMI	2
VGA	1
RS232C	1
USB (Plug-and-play Media player)	1
SD Card (Media player)	Optional
Audio port	1 (Phone jack), 1 RCA

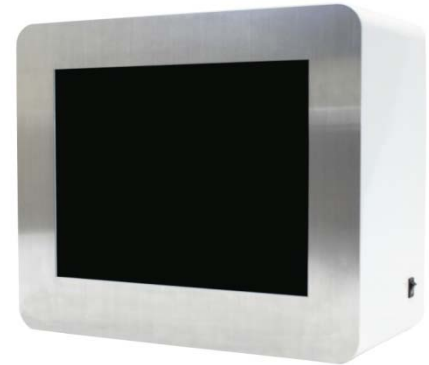

Customized Housing

All GPO Display's Commercial LCD monitors feature the option of custom housing Custom colors, logos and other designs are possible and allow you to match the interior design of a particular room or to match university or corporate colors.

- ✓ Built-in Plug-and-Play USB Multimedia Player
- ✓ Unique aspect ratio
- ✓ Tempered Glass (Optional)

- ✓ Sleek, metal bezel [unbranded-custom logos available upon request]
- ✓ Touch (optional)




* GPO Display may change specifications and designs without notice.

Mechanical Drawing


TR15H

TR-Series transparent LCDs are an eye-catching tool for digital signage, point-of-sale displays, museum exhibits, trophy cases and more. All TR-Series models feature a customizable enclosure with locking rear door. Interactive touch and plug-and-play multimedia players are optional.

Front view

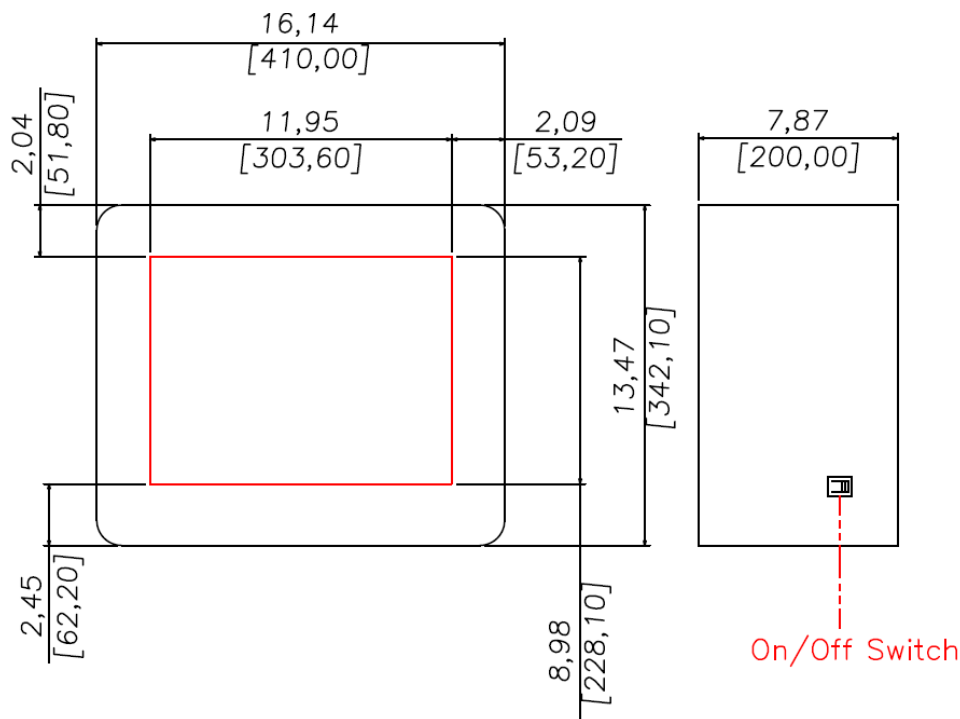

Rear View

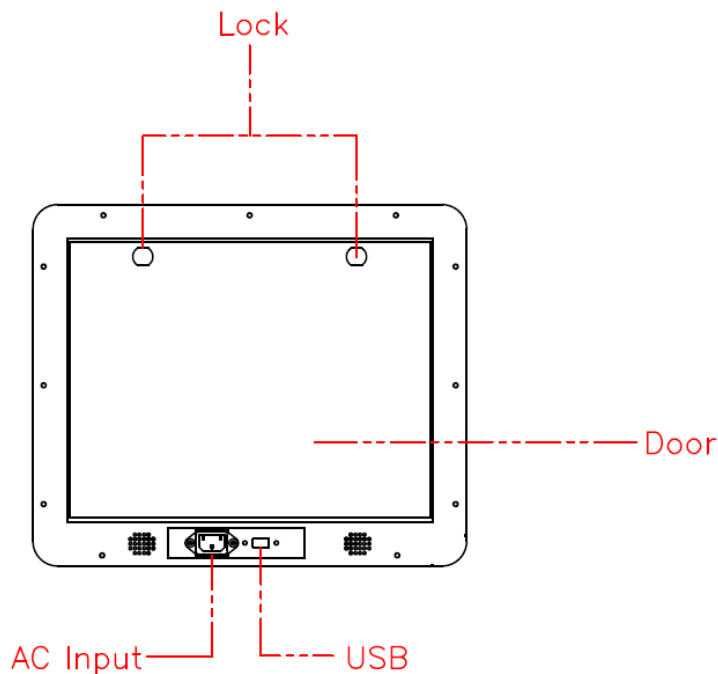

Product specification and design are subject to change without notice.

Copyright©2015 GPO Display All rights reserved. This document may not be copied in any form without written permission from GPO Display Rev.09012015